

400 Watt, DBS Series, DC-DC Converter (Single Output)



- High Input – 200~400VDC
- Regulated Outputs
- 3000V Isolation
- Industry Standard Encapsulated Package
- Full Brick
- Over Voltage and Current Protection
- High Efficiency up to 89%
- -20 to +85 °C Operational Temperature Range



Specification (typical values shown)

Input Range.....	200~400 Volts DC
Outputs.....	Single (see table below plus trim 60~110%)
Start Up Time.....	200ms max
Line Regulation.....	dependent on output voltage – consult office
Load Regulation.....	dependent on output voltage – consult office
Efficiency.....	See table for each model
Over Current Protection.....	above 105% of nominal rated output, automatic recovery
Isolation Voltage.....	I/P~O/P: 3000 VDC
Operating Temperature.....	-20 to +85 °C
Storage Temperature.....	-40 to +85 °C
Approval.....	UL60950-1, cUL, EN60950-1, EN50178 Complies with DEN-AN and IEC60950-1
Case Material.....	Aluminium baseplate, Polycarbonate Case
Weight.....	150 g


Models and Ratings

Model	Input Range	Output Voltage	Output Current	Efficiency
DBS400B03	200~400 VDC	3.3 V	80.0 A	79%
DBS400B05		5.0 V	80.0 A	83%
DBS400B07		7.5 V	54.0 A	86%
DBS400B12		12.0 V	34.0 A	87%
DBS400B15		15.0 V	27.0 A	87%
DBS400B18		18.0 V	22.0 A	89%
DBS400B24		24.0 V	17.0 A	87%
DBS400B28		28.0 V	14.5 A	88%

For mechanical data and pinout, see next page

ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,
 Rochester, Kent, ME24HU, Tel : 01634 725527, Fax : 01634 739111,
 Email : sales@allpsu.co.uk , Web : www.allpsu.co.uk

Mechanical Details and Pin-Out

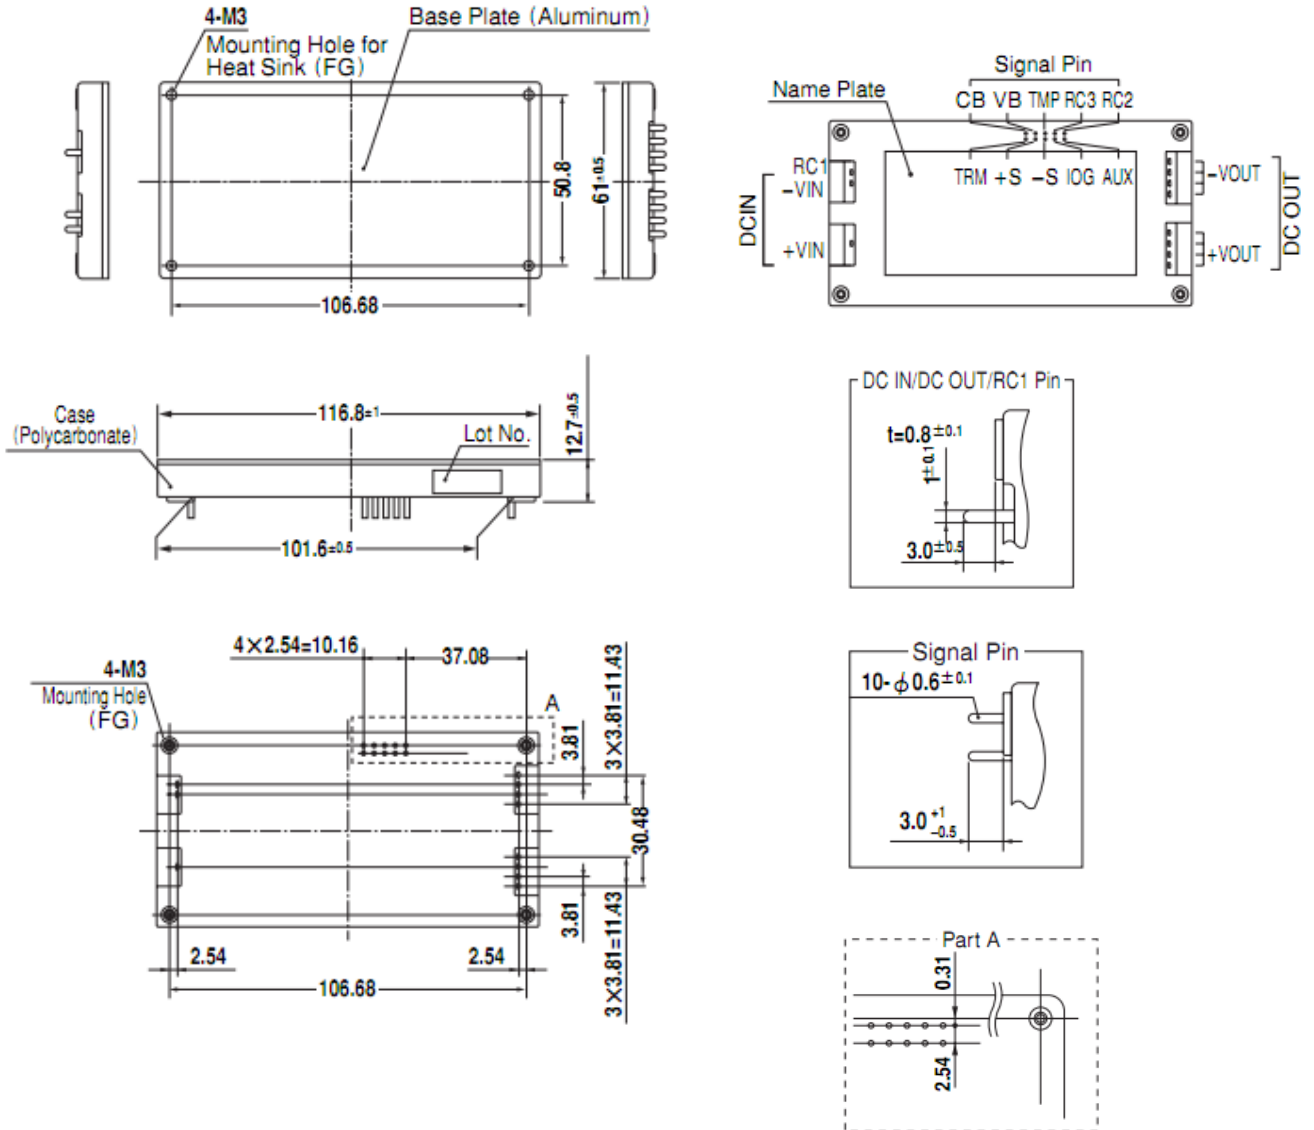

Specifications may change without notice, E&OE. ALL PSU Terms & Conditions apply
ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,
Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111
Email : sales@allpsu.co.uk, Web : www.allpsu.co.uk