

- Universal AC Input
- Fully Enclosed with option of U-Channel chassis or enclosed with low profile end fan
- High Efficiency Up To 92%
- Short Circuit, Over Voltage, Over Load and Over Temperature Protected
- 3 Year Warranty
- Full Approvals: UL/CE
- Ultra Compact Case Size
- Remote on/off, Remote Sense
- DC OK Signal, 5 Volt Stand-By Output
- Variable Speed Temperature Controlled Fan



## Specification

Input Voltage.....	90~264 VAC, 47~63 Hz (120-370 VDC)
Inrush Current.....	<50 A @ 115 VAC, <70 A @ 230 VAC
Output Voltage.....	Single Outputs, See table below
Load Regulation.....	+/-1%, (5 to 100% load)
Line Regulation.....	+/-0.5%, (Full AC range)
Over Voltage Protection.....	Auto Recovery
Short Circuit Protection.....	Auto Recovery
Overload Protection.....	Auto Recovery
Over Temperature Protection.....	Auto Recovery
Hold Up Time.....	10 ms, minimum
Ripple & Noise.....	100mV(12 Volts), 200mV (24 & 36 Volts), 300mV (48 Volts)
Input to Output Isolation.....	I/P-O/P: 3 kVAC,
Operating Temperature .....	-20 to +70 °C, see derating curve
Storage Temperature.....	-25 to +85 °C
Switching Frequency.....	62.5 kHz (±10%)
Safety Standards.....	UL60950-1, CE (surge 4KV)
EMC.....	EN55022 class B, EN55024
Mechanical .....	177.8 x 106.5 x 45.0 mm (Height 60.3mm Inc Fan)
	End Fan Version also available : 202.8 x 106.5 x 45mm (inc fan)
Connections Input & Output.....	Screw terminals for Input and Output (Optional Molex style plug in)
Fixing positions.....	7 on base plus 2 on each long side, all M3 Threads

## Models and Ratings

Model	Output Voltage	Output Current	Efficiency
<a href="#">AQFV480E-12S-AP</a>	12.0 V	40 A	88 %
<a href="#">AQFV480E-24S-AP</a>	24.0 V	20 A	90 %
<a href="#">AQFV480E-36S-AP</a>	36.0 V	13.3 A	92 %
<a href="#">AQFV480E-48S-AP</a>	48.0 V	10 A	91 %

\*NOTES (1) Efficiency is shown at nominal 230VAC Input


(2) All models require 5% minimum load to ensure operation within full specification.  
Units will operate with no load without problem.

Please see next page for mechanical drawings Connections and temperature derating.

**ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,  
Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111  
Email : [sales@allpsu.co.uk](mailto:sales@allpsu.co.uk), Web : [www.allpsu.co.uk](http://www.allpsu.co.uk)**

## Mechanical Drawings.

**Standard Type – Screw Terminal Connections.**  
Please contact ALL PSU for Plug-In connection options

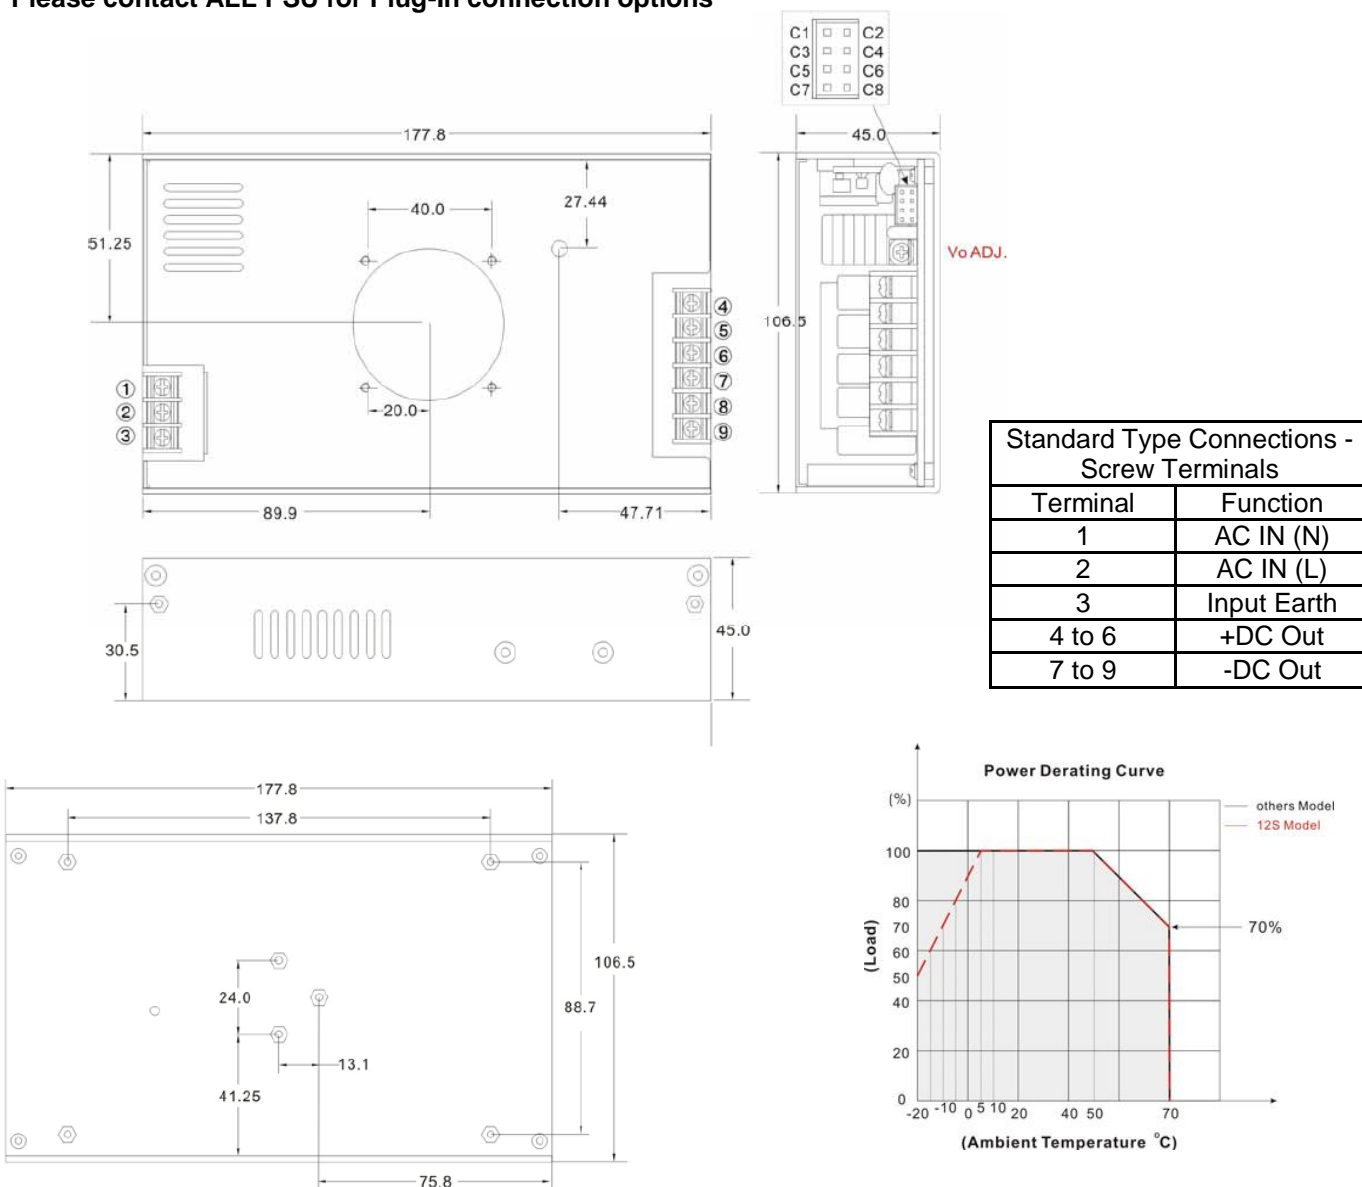

PIN	FUNCTION	DESCRIPTION
C1	+S	Positive sensing. The +S signal should be connected to the positive terminal of the load. The +S and -S leads should be twisted in pair to minimize noise pick-up effect. The maximum line drop compensation is 0.5V. (max.)
	-S	Negative sensing. The -S signal should be connected to the negative terminal of the load. The -S and +S leads should be twisted in pair to minimize noise pick-up effect. The maximum line drop compensation is 0.5V. (max.)
C3	+RC	Turns the output on and off by electrical or dry contact between pin C4 (-RC), Short: = Power OFF, Open = Power ON
C4	-RC	Remote control ground / return
C5	DC-OK	DC-OK Signal is a DC output, referenced to pin C6 (DC-OK GND)
C6	GND	
C7	+5V SB	This pin internally connects to the negative terminals(-DC Out). Return for DC-OK signal output Stand-by voltage output ground 4.5~5.5V, referenced to pin C8 (-5V SB). The maximum load current is 0.6A
C8	-5V SB	Stand-by voltage output ground / return

Specifications may change without notice. E&OE. ALL PSU Terms & Conditions apply.

ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,  
Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111,  
Email : sales@allpsu.co.uk Web : www.allpsu.co.uk