

180 Watt, AQF120U Series, U-Channel Power Supply



electronicpowersolutions

- Universal AC Input
- U-Channel Chassis With Options Of Open Frame & Full Enclosed Formats.
- High Efficiency Up To 93%
- Short Circuit, Over Voltage, Over Load Protected
- Convection Cooled To 120 Watts, Fan Cooled To 180 Watts
- Full Approvals: UL/CE
- Compact Case Size & Optional Input & Output Connections



Specification

Input Voltage.....	90~264 VAC, 47~63 Hz (120-370 VDC) (80-274 VAC or 110-390 VDC with derating)
Inrush Current.....	30 A @ 115 VAC, 60 A @ 230 VAC
Output Voltage.....	Single Outputs, See table below, plus adjustment
Load Regulation.....	+/-1%
Line Regulation.....	+/-1%
Over Voltage Protection.....	>125% Auto Recovery
Short Circuit Protection.....	Auto Recovery
Overload Protection.....	Auto Recovery
Hold Up Time.....	15 - 20 ms,
Ripple & Noise.....	.50mV (12 & 15 Volts), 100mV (5, 24 & 48 Volts)
Input to Output Isolation.....	I/P-O/P: 4 kVAC,
Operating Temperature	-25 to +70 °C, see derating curve
Storage Temperature.....	-25 to +85 °C
Safety Standards.....	UL60950-1 (pending for 5 Volts & 15 Volt models), CE
EMC.....	EN55022 class B, EN55024, EN61000-6-3
Mechanical	127 x 82.2 x 38.1 mm
Connections Input & Output.....	Screw Terminals standard, Molex Option.

Models and Ratings

Model	Output Voltage	Max Output Current Convection Cooled	Max Output Current Fan Cooled	Efficiency
AQF120U-5S-AP*	5.0 V	24 A	30 A	87 %
AQF120U-12S-AP	12.0 V	10 A	15 A	90 %
AQF120U-15S-AP*	15.0 V	8 A	12 A	90 %
AQF120U-24S-AP	24.0 V	5 A	7.5 A	93 %
AQF120U-48S-AP	48.0 V	2.5 A	3.75 A	93 %

Note *, 5V & 15V model do not have UL approval

Please see next page for mechanical drawings.

**ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,
Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111
Email : sales@allpsu.co.uk, Web : www.allpsu.co.uk**



180 Watt, AQF120U Series, U-Channel Power Supply



electronicsolutions


Mechanical Drawings. 5 Volt Output units have 1 pair of bolts for DC Output Voltage

Optional Connectors
Not for 5 Volt units.

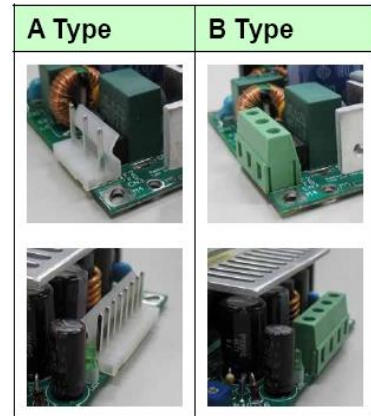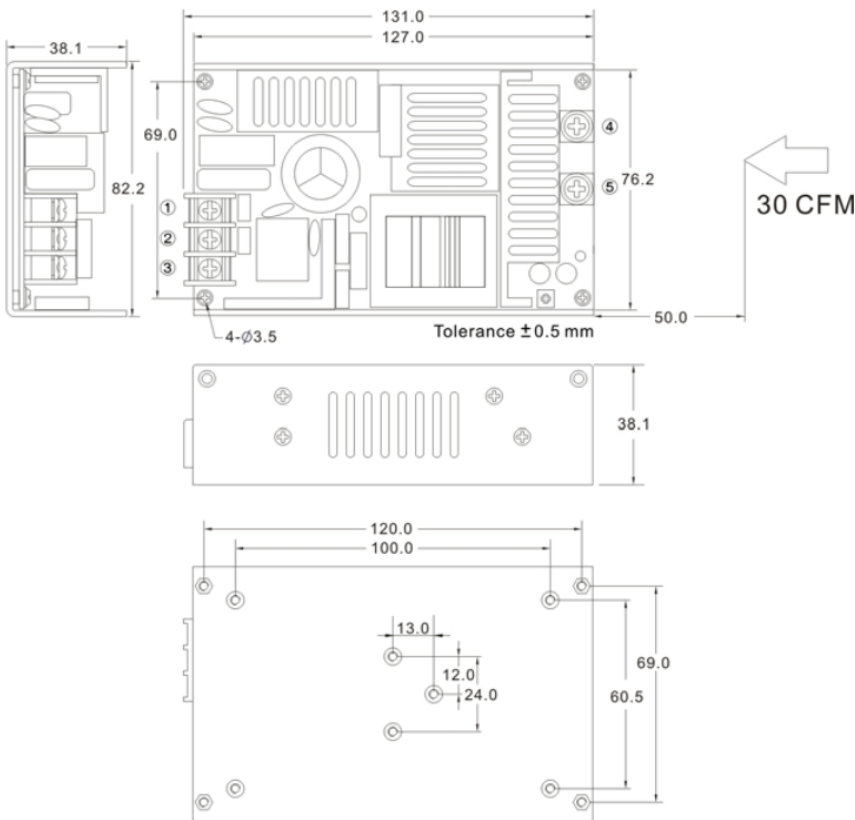

Screw Terminal Connections	
Terminal	Function
1	AC Live
2	AC Neutral
3	Input Earth
4	+DC Out
5	+DC Out
6	-DC Out
7	-DC Out

Derating, (Input AC Supply & Temperature)

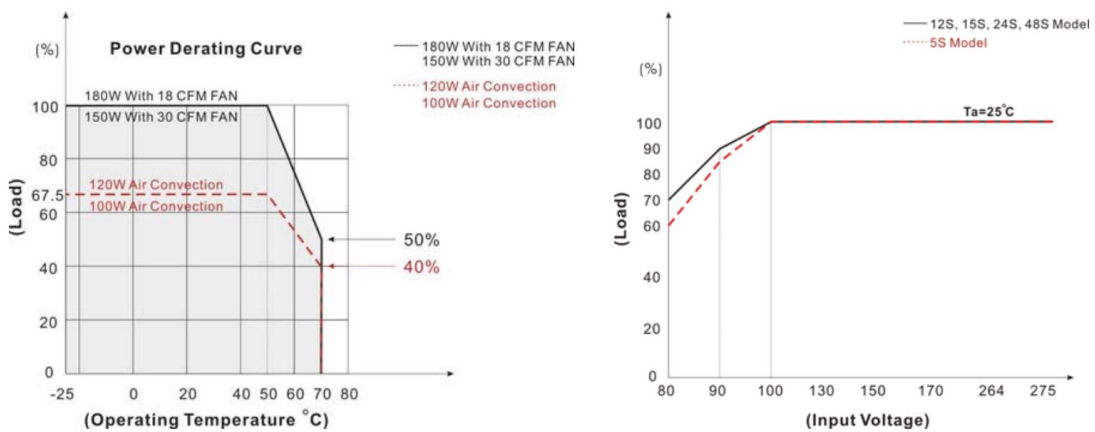

5 volt unit up to 150 Watts with 30 CFM
All other voltages 180 Watts with 18 CFM

Specifications may change without notice. E&OE. ALL PSU Terms & Conditions apply.

**ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,
Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111,
Email : sales@allpsu.co.uk Web : www.allpsu.co.uk**