

## 4 Watt, AOC Series, Encapsulated Power Supply



electronicpowersolutions

- Universal AC Input
- Fully Encapsulated, PCB Mounting Plastic Case
- Extra Wide Temperature Range From -40°C
- Short Circuit, Over Voltage, Over Power Protected
- Convection Cooled
- Full Approvals: UL/cUL/CE
- Low Ripple And Noise
- <0.3 Watts No Load Input Current
- 3 Years Warranty



### Specification

Input Voltage.....	90~264 VAC, 47~440 Hz (120-370 VDC)
Inrush Current.....	15 A @ 115 VAC, 25 A @ 230 VAC
Output Voltage.....	See table below, +/-2% preset accuracy o/p1
Load Regulation (0% to 100% load) .....	+/-1% (3.3 to 9 V o/p) +/-0.5% (12 to 24 V o/p) Dual o/p +/-0.5% o/p1, +/-5% o/p 2
Line Regulation (full range).....	+/-0.2% o/p1, +/-3% o/p2
Over Voltage Protection.....	Zener diode clamp
Short Circuit Protection.....	Hiccup mode, indefinite (automatic recovery)
Hold Up Time.....	15 ms, min
Input to Output Isolation.....	I/P-O/P: 3 kVAC,
Operating Temperature .....	-40 to +70 °C, see derating curve
Storage Temperature.....	-40 to +125 °C
Switching Frequency.....	132 +/-8 kHz
Safety Standards.....	UL/cUL, CE
EMC.....	EN55022 Class B, EN55024
MTBF.....	>350K hours @ 25°C (MIL-HDBK-217F)
Mechanical (PCB Mount Version).....	Encapsulated, 37 x 27.5 x 17.5 mm
Connections Input & Output.....	PCB mounting: through hole pins

### Models and Ratings (Single & Dual Outputs)


Model	Output 1	Output 2	Output Current	Efficiency
<a href="#">AOC-3.3S-AP</a>	3.3 V		1200mA	68%
<a href="#">AOC-5S-AP</a>	5.0 V		800mA	72%
<a href="#">AOC-8S-AP</a>	8.0 V		500mA	74%
<a href="#">AOC-9S-AP</a>	9.0 V		444mA	75%
<a href="#">AOC-12S-AP</a>	12.0 V		333mA	76%
<a href="#">AOC-14S-AP</a>	14.0 V		286mA	76%
<a href="#">AOC-15S-AP</a>	15.0 V		267mA	76%
<a href="#">AOC-24S-AP</a>	24.0 V		167mA	77%
<a href="#">AOC-5S3.3S-AP</a>	+5.0 V	+3.3 V	600 / 150mA	72%
<a href="#">AOC-8S5S-AP</a>	+8.0 V	+5.0 V	375 / 120mA	74%
<a href="#">AOC-12S5S-AP</a>	+12.0 V	+5.0 V	250 / 120mA	75%

Please see next page for mechanical drawings.

ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,  
Rochester, Kent, ME2 4HU, Tel: 01634 725527, Fax: 01634 739111  
Email: [sales@allpsu.co.uk](mailto:sales@allpsu.co.uk), Web: [www.allpsu.co.uk](http://www.allpsu.co.uk)


# 4 Watt, AOC Series, Encapsulated Power Supply

## Mechanical Details, (Top View)

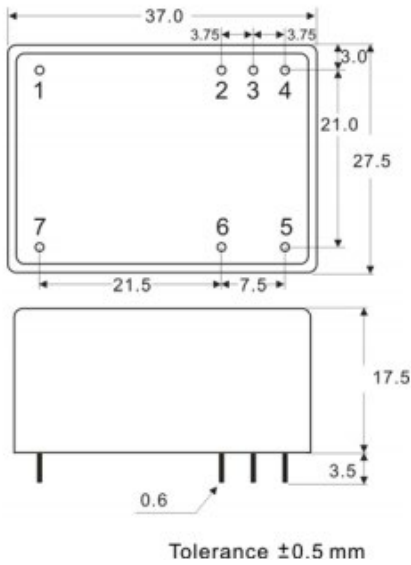

## Pinout

Pin	Function	
	Single o/p	Dual o/p
1	N/C	N/C
2	+V Out	+V 1 Out
3	-V Out	Common
4	N/C	+V 2 Out
5	AC Live in	AC Live in
6	AC Neutral in	AC Neutral in
7	N/C	N/C
N/C = pin with no connection		

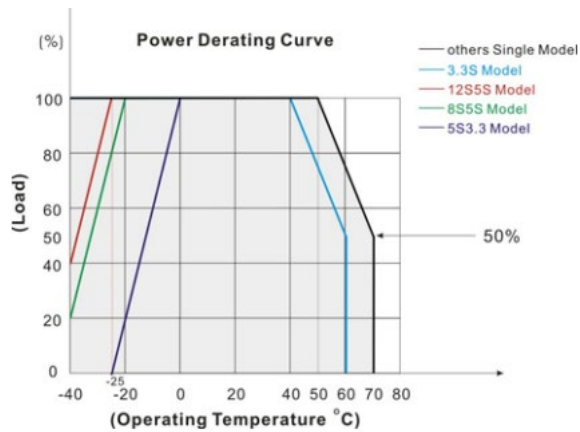

Specifications may change without notice. E&OE. ALL PSU Terms & Conditions apply.