

## 15 Watt, SW15 Series, DC-DC Converter (Single Output)



electronicpowersolutions

- Wide 2:1 Input Range
- Remote on/off Control (option to delete)
- 1600V Isolation
- Ultra Compact 1x1" Encapsulated Metal Case
- PCB Mounting, Option of Chassis Or Din Rail Mount.
- Competitive Prices & 2 Year Warranty
- High Efficiency up to 89%
- Wide Operational Temperature Range



### Specification (typical values shown)

Input Ranges.....	9~18, 18~36 and 36~75 Volts
Outputs.....	Single outputs (see table below)
Line Regulation.....	+/-0.5%
Load Regulation.....	+/-1%
Output Ripple.....	75mV max (3.3 or 5 V o/p) 100mV max (others)
Output Noise.....	100mV max (3.3 or 5 V o/p) 125mV max (others)
Efficiency.....	See table for each model
Short Circuit Protection.....	Current limit, auto-recovery
Isolation Voltage.....	1600 VDC
Operating Temperature.....	-40 to +70 °C @ full load, Derates to 40% at +85°C
Storage Temperature.....	-55 to +105 °C
Case Material.....	6 sided shielded Aluminium, non conductive base
Switching Frequency.....	300 kHz (12 & 15 V o/p), 450kHz (3.3 & 5 V o/p)
MTBF.....	>800,000 hrs @ 25°C (MIL-HDBK-217F)
Warranty.....	2 Years

### Models and Ratings

Model	Input Range (VDC)	Output (VDC)	Output Current	Efficiency
SW15-12-3.3S-AP	9-18 Volts	3.3 Volts	3.5 Amps	85%
SW15-12-5S-AP	9-18 Volts	5.0 Volts	3.0 Amps	89%
SW15-12-12S-AP	9-18 Volts	12 Volts	1.25 Amps	88%
SW15-12-15S-AP	9-18 Volts	15 Volts	1.0 Amps	88%
SW15-24-3.3S-AP	18-36 Volts	3.3 Volts	3.5 Amps	86%
SW15-24-5S-AP	18-36 Volts	5 Volts	3.0 amps	89%
SW15-24-12S-AP	18-36 Volts	12 Volts	1.25 Amps	89%
SW15-24-15S-AP	18-36 Volts	15 Volts	1.0 Amps	89%
SW15-48-3.3S-AP	36-75 Volts	3.3 Volts	3.5 Amps	84%
SW15-48-5S-AP	36-75 Volts	5 Volts	3.0 Amps	88%
SW15-48-12S-AP	36-75 Volts	12 Volts	1.25 Amps	88%
SW15-48-15S-AP	36-75 Volts	15 Volts	1.0 Amps	88%

Note : 20 Watt versions are available in the same package size, please see SW20 series.

For mechanical data and pinout, please see next page


ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,  
 Rochester, Kent, ME24HU, Tel : 01634 725527, Fax : 01634 739111,  
 Email : sales@allpsu.co.uk , Web : www.allpsu.co.uk

# 15 Watt, SW15 Series, DC-DC Converter (Single Output)



electronicpowersolutions

## Mechanical Details and Pin-Out Top View

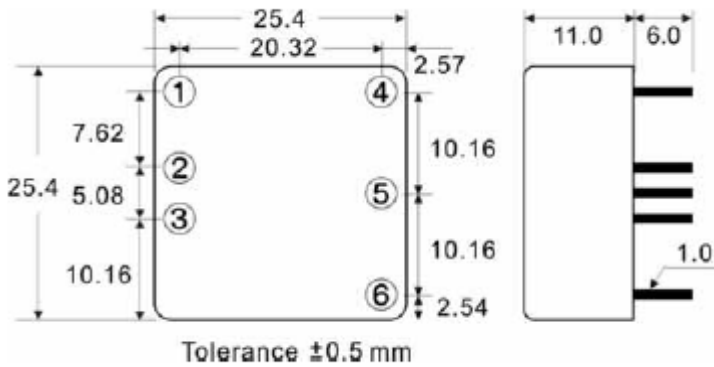


Pin	Single O/P
1	On/Off R/C
2	-V in
3	+V in
4	-V out
5	No Pin
6	+V out
Pin 1 Optional R/C	

Standard format PCB mounting, options available for Screw Terminal or DIN Rail mounting adaptors, please contact ALL PSU sales office for details.

Remote On/Off, Leave pin 1 Open / Not connected = Output On  
Connect control Pin 1 to -V in pin to switch output off.

## Derating Curve

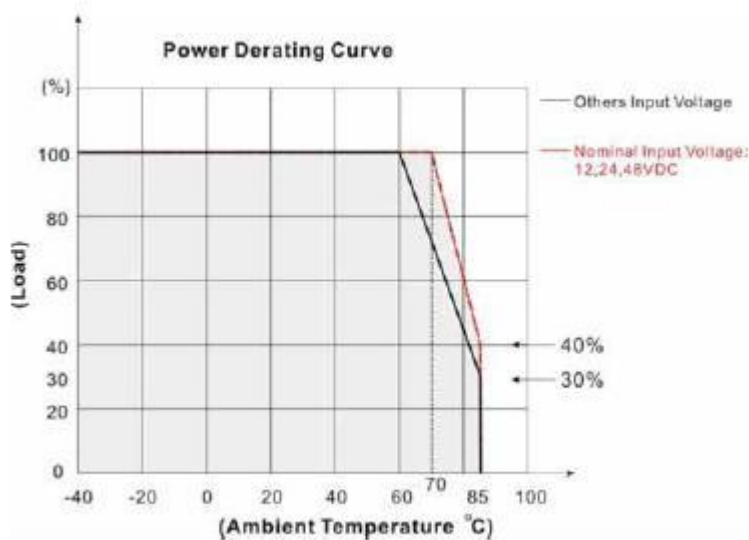

Specifications may change without notice, E&OE. ALL PSU Terms & Conditions apply.

**ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,  
Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111  
Email : sales@allpsu.co.uk, Web : www.allpsu.co.uk**