




# PDF700S(B) CMFC(D/D-P) SERIES 700 WATT AC-DC POWER SUPPLY WITH PFC

## Features

- Universal Input Range 90~264Vac
- Efficiency up to 91.5%
- Class I
- Approval Safety IEC/EN/UL 62368-1
- Operating Altitude 5000m
- Remote On/Off
- Over Temperature Protection
- Over Voltage Protection
- Continuous Short Circuit Protection
- Chassis Mounting, Base Plate Cooled
- Built-In EMI Filter
- PDF700S, PDF700B-CMFD-P for Parallel Operation
- PDF700S Compliance to CE102/RE101 of MIL-STD-461
- PDF700B Compliance to CE101/CE102/RE101 of MIL-STD-461
- PDF700S Approval EN 55032 Class A
- PDF700B Approval EN 55032 Class B

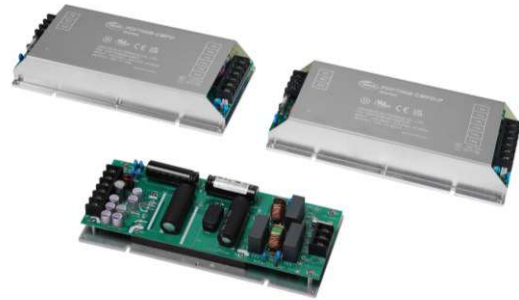

MODEL NUMBER	OUTPUT VOLTAGE	OUTPUT CURRENT NOTE 1	RIPPLE & NOISE NOTE 2	VOLTAGE ACCURACY NOTE 3	LINE REGULATION NOTE 4	LOAD REGULATION NOTE 4	%EFF. (Typ.) NOTE 5
PDF700△120-CMF□	12 V	58.4 A	120 mV	±1.0%	±0.5%	±0.5%	87.5%
PDF700△240-CMF□	24 V	29.2 A	240 mV	±1.0%	±0.5%	±0.5%	90%
PDF700△280-CMF□	28 V	25.0 A	280 mV	±1.0%	±0.5%	±0.5%	90.5%
PDF700△480-CMF□	48 V	14.6 A	480 mV	±1.0%	±0.5%	±0.5%	91%
PDF700△560-CMF□	56 V	12.5 A	560 mV	±1.0%	±0.5%	±0.5%	91.5%

Note:

1. When the baseplate temperature reaches 95°C, the unit will be OTP, the unit need sufficient convection and heat sink.
2. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to the output for ripple and noise measurement @20MHz BW.
3. Voltage accuracy is set at 60% load.
4. Line regulation is measured from 100V<sub>ac</sub> to 264V<sub>ac</sub> at full load. Load regulation is measured from 20% to 100% rated load.
5. Typical efficiency at 230V<sub>ac</sub> and full load at 25°C.
6. The CMFC series does not have a parallel function. If parallel operation is required, it is recommended to use the CMFD series with the CSC01 module or the CMFD-P series alone.
7. △=S or B, □=C or D or D-P.
8. When the PDF700S, PDF700B560-CMFD-P is in operation, detailed voltage specifications can be found in the **output characteristics** table.

## PART NUMBER

Series	EMI (EN55032)	Nominal Output Voltage	Chassis Mount Type	
PDF700	O	XXX	-YYY	Z
PDF700	S : Class A B : Class B	120 : 12V 240 : 24V 280 : 28V 480 : 48V 560 : 56V	-CMF : Chassis Mount built in Filter	C : Open Frame (Only for PDF700S) D : With Cover D-P : With Cover for Parallel

Part Number Example:

**PDF700S120-CMFD:** 700W, Class A, Single 12Vdc Output, Chassis Mount With Cover



# PDF700S(B) CMFC(D/D-P) Series

## TECHNICAL SPECIFICATIONS

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

### ABSOLUTE MAXIMUM RATINGS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input Voltage	Continuous	All	90		264	V <sub>ac</sub>
			120		370	V <sub>dc</sub>
Operating Case Temperature	Measured at the center of base plate	All	-40		95	°C
Storage Temperature		All	-55		105	°C
Operating Altitude		All			5000	m

### INPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Operating Voltage Range		All	100		240	V <sub>ac</sub>
Input Frequency Range	47-63/440 Hz (Safety rating: 50/60 Hz)	All	47		440	Hz
Maximum Input Current	100% Load, V <sub>in</sub> =100V <sub>ac</sub>	All			9	A
Leakage Current		All			1	mA
Inrush Current	V <sub>in</sub> =240V <sub>ac</sub> , Cold Start at 25°C	All		35		A
Under Voltage Protection		All	63		77	V <sub>ac</sub>
Power Factor	230V <sub>ac</sub> /50Hz @ Full load	All		0.97		

### OUTPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Output Voltage Set Point	V <sub>in</sub> =115V <sub>ac</sub> and 230V <sub>ac</sub> , I <sub>o</sub> =60% I <sub>o max.</sub> , T <sub>c</sub> =25°C	120-CMFC(D)	11.88	12	12.12	V <sub>dc</sub>
		240-CMFC(D)	23.76	24	24.24	
		280-CMFC(D)	27.72	28	28.28	
		480-CMFC(D)	47.52	48	48.48	
		560-CMFC(D)	55.44	56	56.56	
	V <sub>in</sub> =115V <sub>ac</sub> and 230V <sub>ac</sub> , Load=0W, T <sub>c</sub> =25°C (The output voltage of 560-CMFD-P need to be adjusted downward to avoid OVP, e.g. 56.7V and 54V on this table.)	120-CMFD-P	12.53	12.6	12.67	V <sub>dc</sub>
		240-CMFD-P	25.07	25.2	25.33	
		280-CMFD-P	29.25	29.4	29.55	
		480-CMFD-P	50.14	50.4	50.66	
		560-CMFD-P	56.41	56.7	56.99	
	V <sub>in</sub> =115V <sub>ac</sub> and 230V <sub>ac</sub> , Load=600W, T <sub>c</sub> =25°C	120-CMFD-P	11.76	12	12.24	V <sub>dc</sub>
		240-CMFD-P	23.52	24	24.48	
		280-CMFD-P	27.44	28	28.56	
		480-CMFD-P	47.04	48	48.96	
		560-CMFD-P	52.92	54	55.08	
Operating Output Current Range	V <sub>in</sub> =115V <sub>ac</sub> and 230V <sub>ac</sub> , T <sub>c</sub> =25°C (When the PDF700S, PDF700B-CMFD-P is used in parallel, 85% of the total rated power is recommended)	120-CMFC(D)			58.4	A
		240-CMFC(D)			29.2	
		280-CMFC(D)			25.0	
		480-CMFC(D)			14.6	
		560-CMFC(D)			12.5	
		120-CMFD-P		50.0	58.4	A
		240-CMFD-P		25.0	29.2	
		280-CMFD-P		21.4	25.0	
		480-CMFD-P		12.5	14.6	
		560-CMFD-P		11.1	12.5	
Holdup Time	V <sub>in</sub> =115V <sub>ac</sub> (refer to the application note)	All		16		ms
Output Voltage Regulation						
Load Regulation	20% Load to 100% load	CMFC(D)			±0.5	%
	20% Load to 85.7% load (600W)	CMFD-P			±7	



## PDF700S(B) CMFC(D/D-P) Series

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Line Regulation	$V_{in}$ =High line to low line	All			±0.5	%
Output Voltage Trim Range	$P_o \leq$ max. rated power, $I_o \leq I_{o\_max}$ . (refer to the application note)	560-CMFC(D) Others-CMFC(D)	-5		+1.8 +5	%
	No load, (refer to the application note)	560-CMFD-P Others-CMFD-P	0		+1.8 +5	
Over Current Protection	Hiccup mode, auto recovery	All	105		220	%
Over Voltage Protection	Latch off (recycle AC input to restart)	120-CMFC(D/D-P) 240-CMFC(D/D-P) 280-CMFC(D/D-P) 480-CMFC(D/D-P) 560-CMFC(D/D-P)			16.8 33.6 39.2 57.6 59.9	$V_{dc}$
Output Ripple and Noise	1. Add a 0.1uF ceramic capacitor and a 10uF aluminum electrolytic capacitor to output 2. Oscilloscope is 20MHz band width 3. Ambient temperature=25°C	120-CMFC(D/D-P) 240-CMFC(D/D-P) 280-CMFC(D/D-P) 480-CMFC(D/D-P) 560-CMFC(D/D-P)			120 240 280 480 560	mV
Load Capacitance	1. Input voltage is 115V <sub>ac</sub> and 230V <sub>ac</sub> 2. Output is max. load 3. Ambient temperature=25°C	120-CMFC(D/D-P) 240-CMFC(D/D-P) 280-CMFC(D/D-P) 480-CMFC(D/D-P) 560-CMFC(D/D-P)			58340 29170 25000 14590 12500	uF

### EFFICIENCY

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Efficiency	1. Output is rated load 2. Input voltage is 230V <sub>ac</sub>	120-CMFC(D/D-P) 240-CMFC(D/D-P) 280-CMFC(D/D-P) 480-CMFC(D/D-P) 560-CMFC(D/D-P)		87.5 90 90.5 91 91.5		%

### ISOLATION CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input to Output	1 Minute (without dielectric breakdown)	All			3000	$V_{ac}$
Input to Earth (Ground)	1 Minute (without dielectric breakdown)	All			2000	$V_{ac}$
Output to Earth (Ground)	1 Minute (without dielectric breakdown)	All			500	$V_{ac}$
Isolation Resistance	Input to output	All	100			MΩ

### FEATURE CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Switching Frequency		All		220		kHz
Over Temperature Shutdown	Measured at the center of base plate, auto recovery	All		105		°C
Over Temperature Recovery				100		
Series Operation	Refer to the application note	All	Possible			
Parallel Operation	Refer to the application note	CMFC(D)	Not recommended			
		CMFD-P	Possible			



# PDF700S(B) CMFC(D/D-P) Series




## GENERAL SPECIFICATIONS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
MTBF	I <sub>o</sub> =100%, T <sub>a</sub> =25°C per MIL-HDBK-217F I <sub>o</sub> =100%, T <sub>a</sub> =25°C, Telcordia SR332	All	160 840			k hours
Humidity	Non-condensing	All			93	% RH
Shock	Meets MIL-STD-810F Table 516.5, Table 516.5-I 10ms, each axis 3 times(±X, ±Y, ±Z axis)	All		75		g
Vibration	Meets MIL-STD-810F Table 514.5C-VIII, 15~2000Hz, X, Y, Z axis, 1hr (each axis),. total 3 hrs.	All		4		g
Weight		CMFC CMFD(D-P)		760 880		grams
Dimensions		CMFC CMFD(D-P)	9.45x4.33x1.587 Inches (240x110x40.30 mm) 9.45x4.33x1.654 Inches (240x110x42.00 mm)			
Case Material		CMFC CMFD(D-P)	Aluminum Base Aluminum Base and Aluminum Cover			
<b>Safety</b>	Class I, IEC/EN/UL 62368-1				Ed 3.0	
<b>EMC Emission</b>	EN 55032				Class A (PDF700S) Class B (PDF700B)	
Conducted Disturbance	EN 55032				Class A (PDF700S) Class B (PDF700B)	
Radiated Disturbance	EN 55032				Class A (PDF700S) Class B (PDF700B)	
Harmonic Current Emissions	EN 61000-3-2:2019+A1:2021					
Voltage Fluctuations & Flicker	EN 61000-3-3:2013+A2:2021					
<b>EMC Immunity</b>	EN 55035					
Electrostatic Discharge (ESD)	IEC 61000-4-2:2008, Air Discharge: ±8kV Contact Discharge: ±4kV				Criterion A	
Radio-Frequency, Continuous Radiated Disturbance	IEC 61000-4-3:2020				Criterion A	
Electrical Fast Transient (EFT)	IEC 61000-4-4:2012, ±1kV, ±2kV				Criterion A	
Surge	IEC 61000-4-5:2014+A1:2017 L-N: ±0.5kV, ±1kV, ±2kV, L-E(ground): ±0.5kV, ±1kV, ±2kV, ±4kV				Criterion A (±2kV) Criterion B (±4kV)	
Conducted Disturbances, Induced by RF Fields	IEC 61000-4-6:2013+COR1:2015				Criterion A	
Power Frequency Magnetic Field	IEC 61000-4-8:2009				Criterion A	
Voltage Dips	IEC 61000-4-11:2020, Dip: 30% Reduction, Dip >95% Reduction				Criterion A	
Voltage Interruptions	IEC 61000-4-11:2020, >95% Reduction				Criterion B	
<b>MIL-STD-461 EMI</b>	PDF700S complies with CE102, RE101 PDF700B complies with CE101 (Submarine), CE102 and RE101					
Application Note Link	<a href="#">PDF700S(B) CMFC(D/D-P) Series App Notes</a>					







## CHARACTERISTIC CURVE

### Power Derating Curve

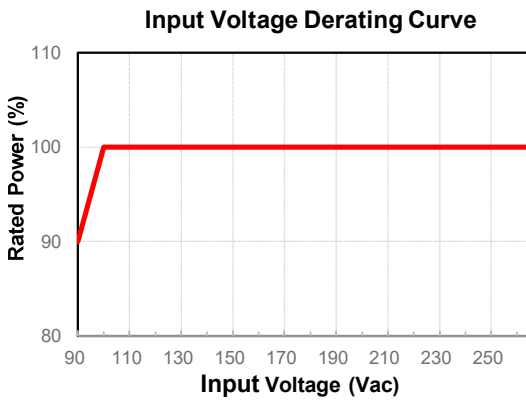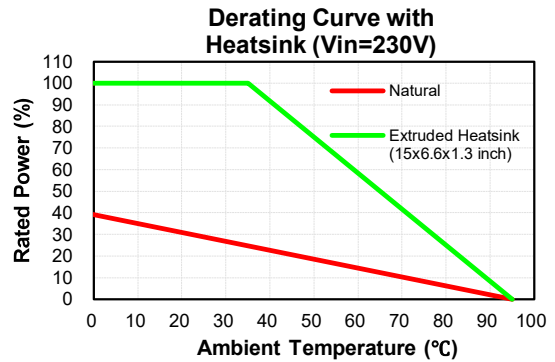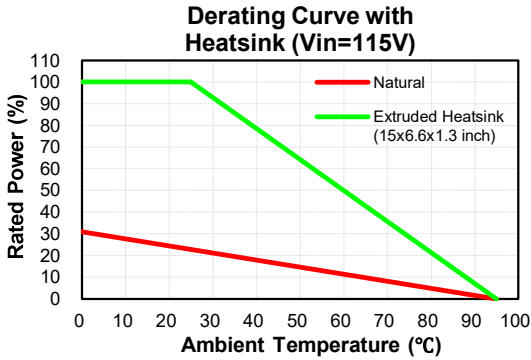


### Performance Data

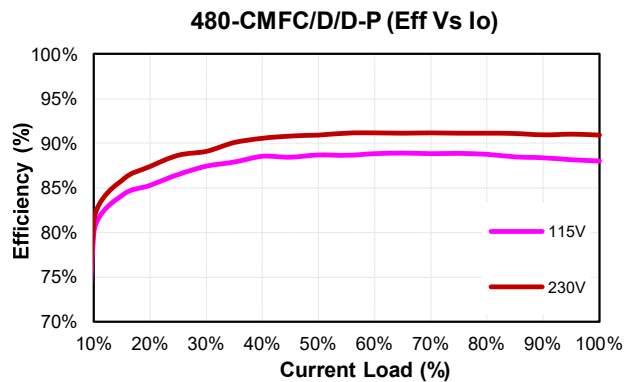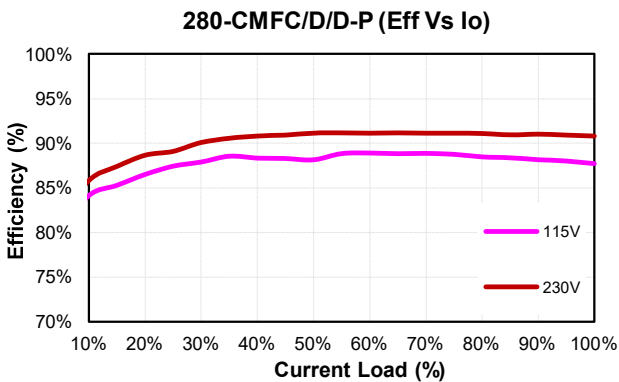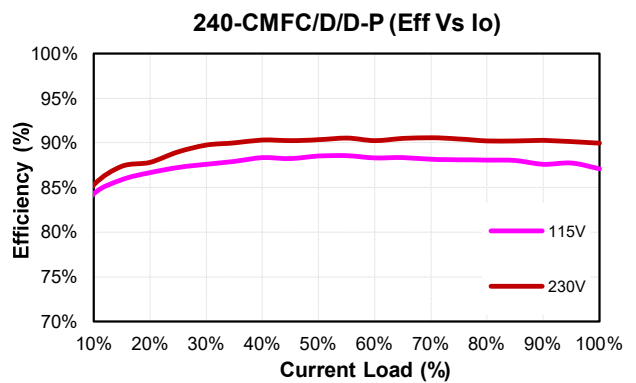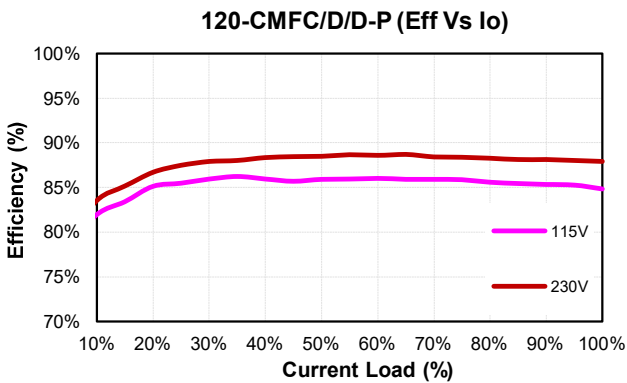




# PDF700S(B) CMFC(D/D-P) Series

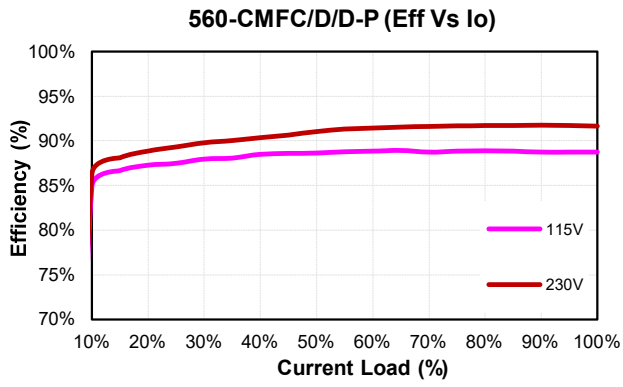



# PDF700S(B) CMFC(D/D-P) Series

## MECHANICAL SPECIFICATION

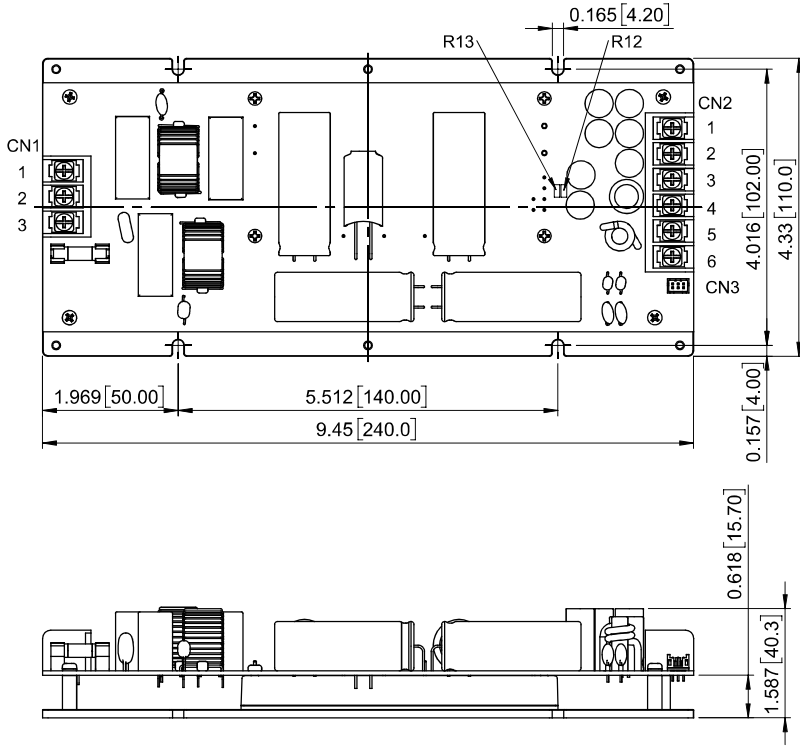

### PDF700S-CMFC

All Dimensions in Inches[mm]  
 Tolerance Inches: x.xx=±0.03, x.xxx=±0.020  
 Millimeters: x.x=±0.7, x.xx=±0.50

AC Input Connector(CN1) :  
 DINKLE DT-49-B01W-03 or equivalent

Pin	Function	Mating Wire Range
1	FG	12~22 AWG
2	AC1	
3	AC2	

DC Output Connector(CN2) :  
 DINKLE DT-49-B01W-06 or equivalent


Pin	Function	Mating Wire Range
1	-Vo	12~22 AWG
2	-Vo	
3	-Vo	
4	+Vo	
5	+Vo	
6	+Vo	

DC Output Connector(CN3) :  
 LCU P220V-2x3 or equivalent

Pin	Function	Mating Housing	Terminal
1	ON/OFF+	H220G1-2X3 or equivalent	LCU T220 or equivalent
2	IOG		
3	NC		
4	ON/OFF-		
5	NC		
6	NC		

### PDF700S-CMFD

All Dimensions in Inches[mm]  
 Tolerance Inches: x.xx=±0.03, x.xxx=±0.020  
 Millimeters: x.x=±0.7, x.xx=±0.50

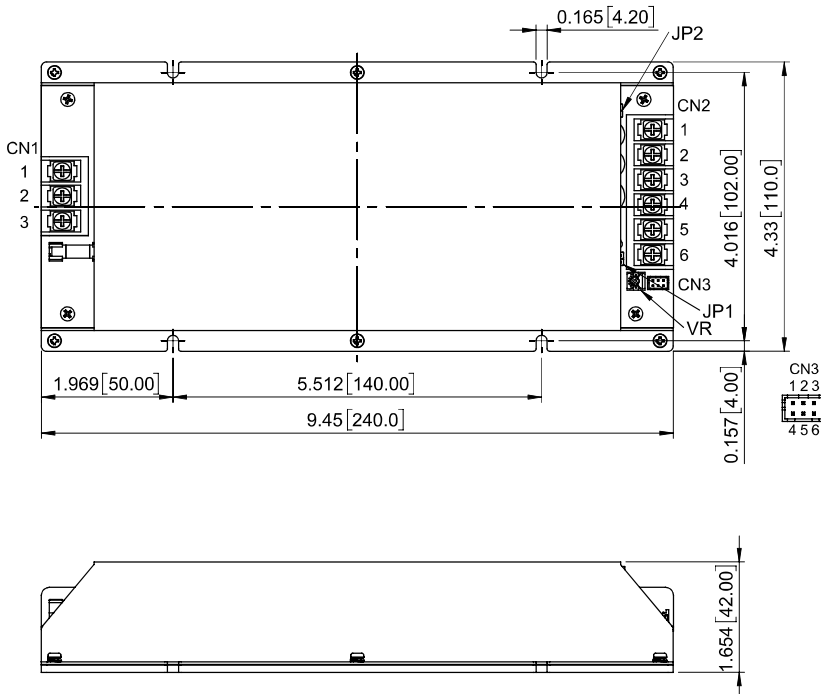

AC Input Connector(CN1) :  
 DINKLE DT-49-B01W-03 or equivalent

Pin	Function	Mating Wire Range
1	FG	12~22 AWG
2	AC1	
3	AC2	

DC Output Connector(CN2) :  
 DINKLE DT-49-B01W-06 or equivalent

Pin	Function	Mating Wire Range
1	-Vo	12~22 AWG
2	-Vo	
3	-Vo	
4	+Vo	
5	+Vo	
6	+Vo	

DC Output Connector(CN3) :  
 LCU P220V-2x3 or equivalent

Pin	Function	Mating Housing	Terminal
1	TRIM	LCU H220G1-2X3 or equivalent	LCU T220 or equivalent
2	-S		
3	ON/OFF-		
4	IOG		
5	+S		
6	ON/OFF+		





DC Output Connector(JP1&JP2) :  
 LCU P301G-02-G1 or equivalent

Pin	Function	Mating Housing	Terminal
JP1	Short +S&+Vo	LCU H301G-02 or equivalent	LCU T306 or equivalent
JP2	Short -S&-Vo		



# PDF700S(B) CMFC(D/D-P) Series

## MECHANICAL SPECIFICATION

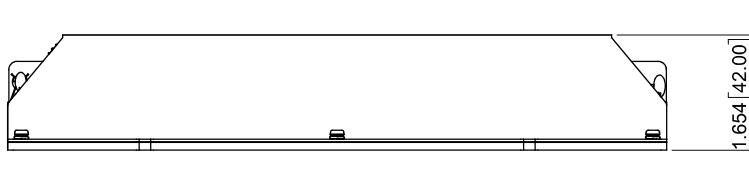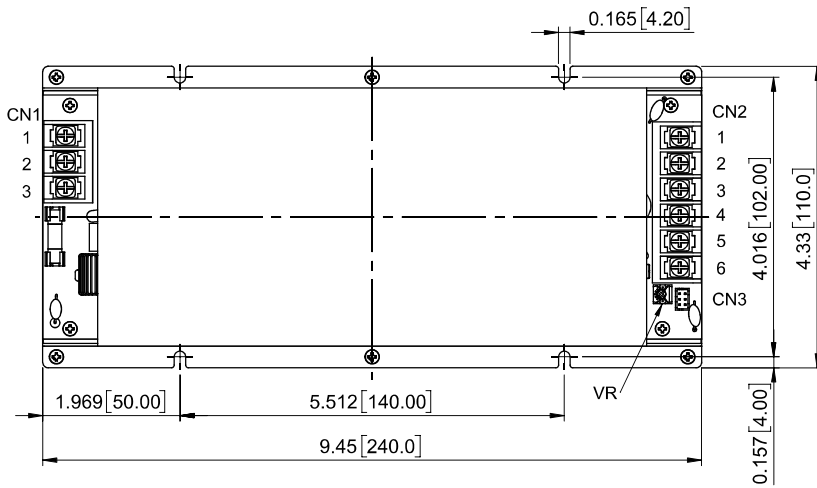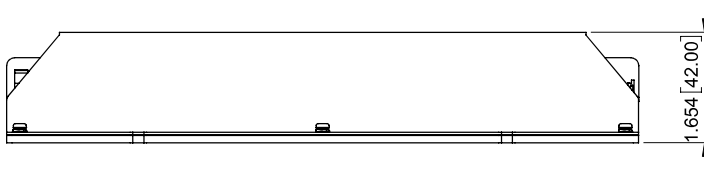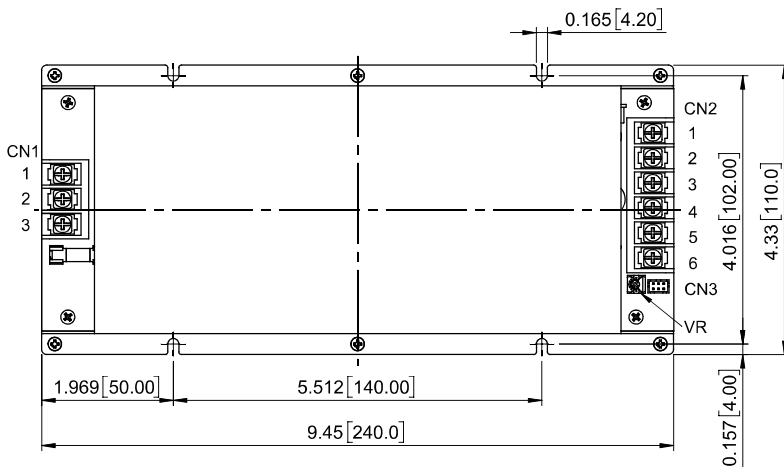

## PDF700S-CMFD-P

All Dimensions in Inches[mm]

Tolerance Inches: x.xx=±0.03, x.xxx=±0.020

Millimeters: x.x=±0.7, x.xx=±0.50

AC Input Connector(CN1) :  
DINKLE DT-49-B01W-03 or equivalent

Pin	Function	Mating Wire Range
1	FG	12~22 AWG
2	AC1	
3	AC2	

DC Output Connector(CN2) :  
DINKLE DT-49-B01W-06 or equivalent

Pin	Function	Mating Wire Range
1	-Vo	12~22 AWG
2	-Vo	
3	-Vo	
4	+Vo	
5	+Vo	
6	+Vo	

DC Output Connector(CN3) :  
LCU P220V-2x3 or equivalent

Pin	Function	Mating Housing	Terminal
1	-Vo	LCU H220G1-2X3 or equivalent	LCU T220 or equivalent
2	NC		
3	ON/OFF-		
4	IOG		
5	NC		
6	ON/OFF+		

## PDF700B-CMFD

All Dimensions in Inches[mm]

Tolerance Inches: x.xx=±0.03, x.xxx=±0.020

Millimeters: x.x=±0.7, x.xx=±0.50

AC Input Connector(CN1) :  
DINKLE DT-49-B01W-03 or equivalent

Pin	Function	Mating Wire Range
1	FG	12~22 AWG
2	AC1	
3	AC2	

DC Output Connector(CN2) :  
DINKLE DT-49-B01W-06 or equivalent

Pin	Function	Mating Wire Range
1	-Vo	12~22 AWG
2	-Vo	
3	-Vo	
4	+Vo	
5	+Vo	
6	+Vo	

DC Output Connector(CN3) :  
LCU P220V-2x3 or equivalent

Pin	Function	Mating Housing	Terminal
1	-Vo	LCU H220G1-2X3 or equivalent	LCU T220 or equivalent
2	NC		
3	ON/OFF-		
4	IOG		
5	NC		
6	ON/OFF+		






# PDF700S(B) CMFC(D/D-P) Series

## MECHANICAL SPECIFICATION

### PDF700B-CMFD-P

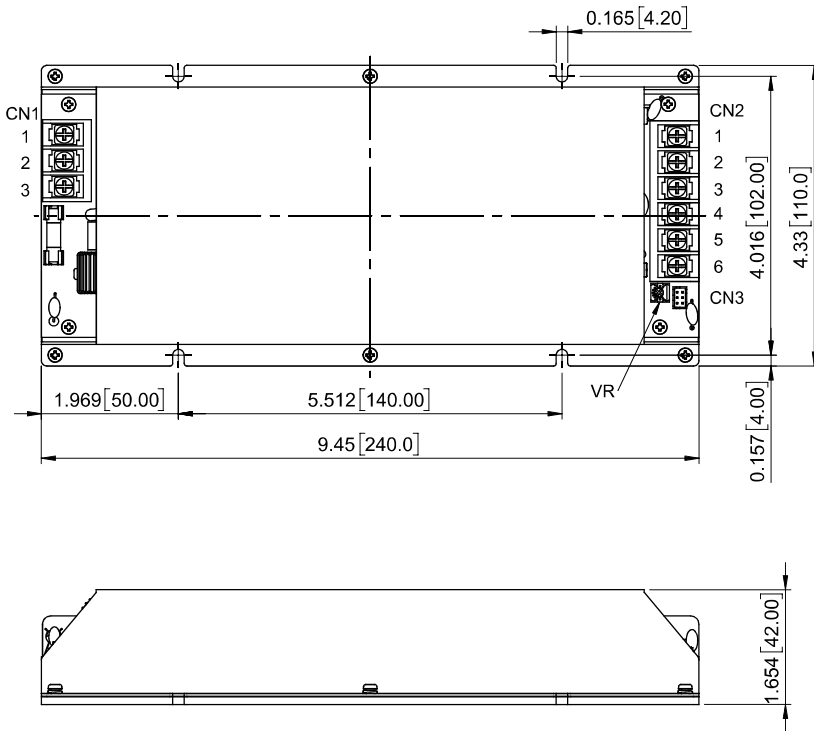

All Dimensions in Inches[mm]

Tolerance Inches: x.xx=±0.03, x.xxx=±0.020

Millimeters: x.x=±0.7, x.xx=±0.50

AC Input Connector(CN1) :  
DINKLE DT-49-B01W-03 or equivalent

Pin	Function	Mating Wire Range
1	FG	12~22 AWG
2	AC1	
3	AC2	

DC Output Connector(CN2) :  
DINKLE DT-49-B01W-06 or equivalent

Pin	Function	Mating Wire Range
1	-Vo	12~22 AWG
2	-Vo	
3	-Vo	
4	+Vo	
5	+Vo	
6	+Vo	

DC Output Connector(CN3) :  
LCU P220V-2x3 or equivalent

Pin	Function	Mating Housing	Terminal
1	-Vo	LCU H220G1-2X3 or equivalent	LCU T220 or equivalent
2	NC		
3	ON/OFF-		
4	IOG		
5	NC		
6	ON/OFF+		