

65 WATTS

SRW-65 SERIES AC-DC

FEATURES:

- RoHS Compliant
- Universal 85-264 VAC Input
- Compact 4.0" x 6.0" x 1.1" Size
- 2 Year Warranty
- Fits 1U Applications
- One to Four Outputs
- EN 60950-1 ITE Certification
- Class B Emissions per EN 55022
- Optional Chassis and Cover



OPEN FRAME



CHASSIS/COVER

SAFETY SPECIFICATIONS

General	Protection Class: I
	Overvoltage Category: II
	Pollution Degree: 2
Underwriters Laboratories File E137708/E140259	UL 60950-1 2 nd Edition, 2007
	CB Certificate per IEC 60950-1:2005 2 nd Edition +A1:2009 including all National Deviations
UL Recognition Mark for Canada File E137708/E140259	CAN/CSA-C22.2 No. 60950-1-07, 2 nd Edition
	EN 60950-1/A12:2011
Low Voltage Directive (2006/95/EC of December 2006) RoHS Directive (Recast) (2011/65/EU of June 2011)	

MODEL LISTING

MODEL NO.	OUTPUT 1	OUTPUT 2	OUTPUT 3	OUTPUT 4
SRW-65-4001	+5V/5A	-5V/3A	+12V/2A	-12V/2A
SRW-65-4002	+5V/5A	+12V/1A	+12V/2A	-12V/2A
SRW-65-4003	+5V/5A	+24V/1A	+12V/2A	-12V/2A
SRW-65-4004	+5V/5A	-5V/3A	+15V/2A	-15V/2A
SRW-65-4005	+5V/5A	+24V/1A	+12V/2A	-5V/2A
SRW-65-4006	+5V/5A	+24V/1A	+15V/2A	-15V/2A
SRW-65-4007	+5V/5A	+26V/1A	+15V/2A	-15V/2A
SRW-65-4008	+5V/5A	+24V/1A	+12V/2A	-12V/2A
SRW-65-4009	5V/7.5A	+48V/.25A	+15V/1A	-15V/1A
SRW-65-4103	+5V/5A	+26V/1A	+12V/2A	-12V/2A
SRW-65-4104	+5V/4A	5V/.25A	+15V/2.5A	24V/.50A
SRW-65-3001	+5V/5A		+12V/3A	-12V/1A
SRW-65-3002	+5V/7A		+12V/2A	-12V/2A
SRW-65-3003	+5V/7A		+15V/2A	-15V/2A
SRW-65-3004	+5V/5A	-5V/4A	+12V/2A	
SRW-65-3005	+5V/5A	-5V/4A	+24V/1A	
SRW-65-3006	+5.25V/6A	+15V/1A	+34V/1.5A	
SRW-65-2001	+5V/7A			-5V/5A
SRW-65-2002	+5V/7A		+12V/3A	
SRW-65-2003	+12V/3A			-12V/2.5A
SRW-65-2004	+15V/2.5A			-15V/2A
SRW-65-2005	+5V/7A		+24V/1.5A	
SRW-65-2006	+5V/9A		+12V/2A	
SRW-65-2008	+6V/5A			-6V/5A
SRW-65-1001	+5V/13A			
SRW-65-1002	+12V/5.4A			
SRW-65-1003	+15V/4.3A			
SRW-65-1004	+24V/2.7A			
SRW-65-1005	+18V/3.6A			
SRW-65-1006	+24V/3.33A			
SRW-65-1104	+24V/3.33A			
SRW-65-1105	+21V/3.1A			

OUTPUT SPECIFICATIONS

Total Output Power at 50°C	65W		
Output Voltage Centering	Output 1:	± 1.0%	(All outputs at 50% load)
	Output 2:	± 5.0%	
	Output 3:	± 5.0%	
	Output 4:	± 5.0%	
Output Voltage Adjust Range	Output 1:	95 - 105%	
Load Regulation	Output 1:	1.0%	(10-100% load change)
	Output 2:	5.0%	(20-80% load change)
	Output 3:	5.0%	(20-80% load change)
	Output 4:	5.0%	(20-80% load change)
Source Regulation	Outputs 1 - 4:	0.5%	
Cross Regulation	Output 2:	5.0%	(Output 1 load varied 50-100%)
	Output 3:	5.0%	
	Output 4:	5.0%	
Output Noise	Outputs 1 - 4:	1.0%	
Turn on Overshoot	None		
Transient Response	Outputs 1 - 4		
	Voltage Deviation	5.0%	
	Recovery Time	2 mS	
	Load Change	50% to 100%	
Output Overvoltage Protection (optional)	Output 1:	110% to 150%	
Output Overpower Protection	Outputs 1-4:	110% Min. Outputs cycle on/off, auto recovery	
Hold Up Time	16 mS min., 65W, 120V Input		
Start Up Time	1 Second		

INPUT SPECIFICATIONS

Source Voltage	85 - 264 Volts AC		
Frequency Range	47 - 63 Hz		
Source Current			
	True RMS	1.5A at 85V Input	
	Peak Inrush	40 A	
Efficiency	.72-.80 (Varies by model)		

ENVIRONMENTAL SPECIFICATIONS

Ambient Operating	0° C to + 50° C		
Temperature Range	Derating: See Power Rating Chart		
Ambient Storage Temp. Range	- 40° C to + 85° C		
Temperature Coefficient	Outputs 1 - 4:	0.02%/°C	
Conducted Emissions	EN 55022 Class B		

GENERAL SPECIFICATIONS

Dielectric Strength(7)			
	Reinforced Insulation	4242 VDC, Primary to Secondary, 1 Sec.	
	Basic Insulation	2121 VDC, Primary to Ground, 1 Sec.	
	Operational Insulation	500 VDC, Secondary to Ground, 1 Sec.	
Power Fail Signal (optional)	Logic low with input power failure, 2mS minimum prior to output 1 drooping 1%		
Mean-Time Between Failures	150,000 Hours min., MIL-HDBK-217F, 25° C, GB		
Weight	0.80 Lbs.	Open Frame	
	1.65 Lbs.	Chassis and Cover	





NOTES

Consult factory for alternate output configurations.
 Consult factory for positive, negative or floating outputs.
 Refer to Applications Information for complete output power ratings.
 All specifications are maximum at 25° C, 65W unless otherwise stated, may vary by model and are subject to change without notice.
 Specify optional chassis and cover, power fail, overvoltage protection, transient protection or DC Input when ordering.
 TUV only: SRW-65-2008

ALL PSU LTD

Unit D6 Laser Quay | Culpeper Close | Medway City Estate | Rochester | Kent
 ME2 4HU Tel : 01634 725527 | Fax : 01634 739111
 Email : sales@allpsu.co.uk | Web : www.allpsu.co.uk

SRW-65 SERIES MECHANICAL SPECIFICATIONS

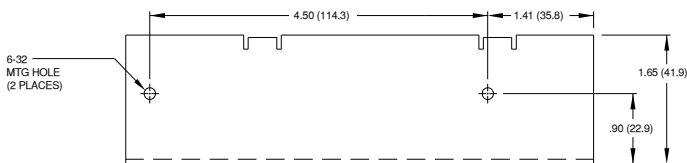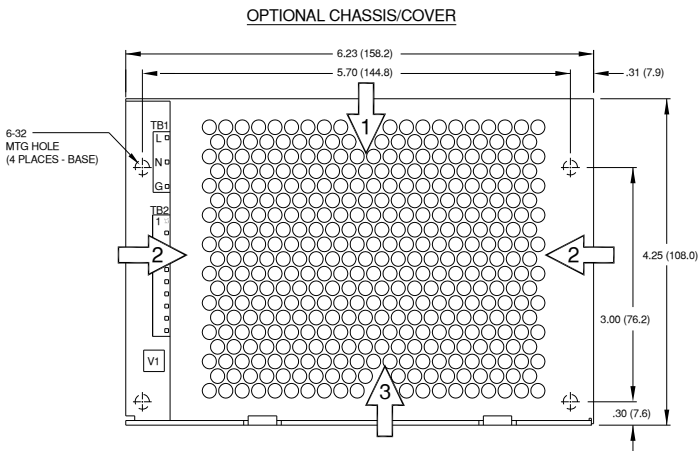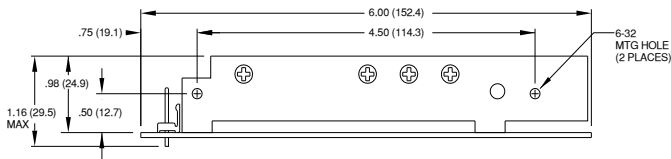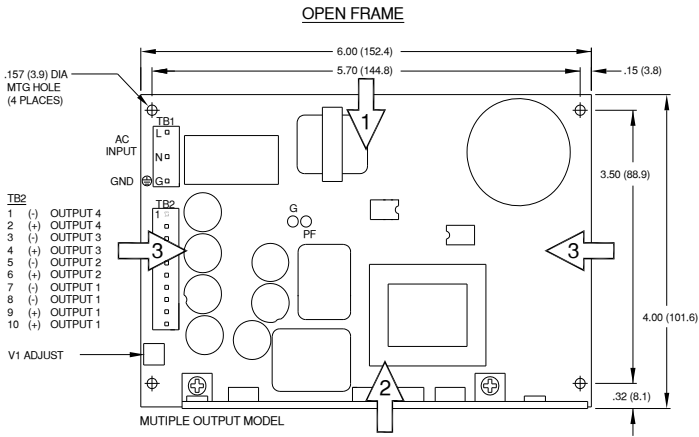


ALL DIMENSIONS IN INCHES (MM)

APPLICATIONS INFORMATION

- Each output can deliver its rated load but total output power must not exceed 65 watts.
- Semiconductor case temperatures must not exceed 110°C.
- Sufficient area must be provided around convection cooled power supplies to allow natural movement of air to develop.
- This product is intended for use as a professionally installed component within information technology.
- A minimum load of 20% is required on output one to insure proper regulation of remaining outputs.
- Peak to peak output ripple and noise is measured directly at the output terminals of the power supply, without the use of the probe ground lead or retractable tip, 20 MHz bandwidth.
- This product was type tested and safety certified using the dielectric strength test voltages listed in Table 5B of UL 60950-1. In consideration of Clause 5.2.2, care must be taken to insure that the voltage applied to a reinforced insulation does not overstress basic insulation. Secondary to ground capacitors may need to be removed prior to performing a dielectric strength type test on the end product. It is highly recommended that the DC equivalent test voltages be used when performing a production-line dielectric strength test of the assembled end product. Please consult factory for further information.
- This power supply has been safety approved and final tested using a DC dielectric strength. Please consult factory before performing an AC dielectric strength test.
- Maximum screw penetration into mounting holes is .250 inches.

MAXIMUM OUTPUT POWER VS. AMBIENT TEMPERATURE

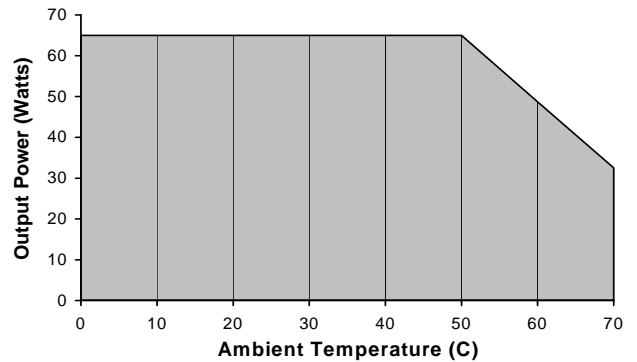

CONNECTOR SPECIFICATIONS

TB1/G AC Input	.156 friction lock header mates with Molex 09-50-3051 or equivalent crimp terminal housing with Molex 08-50-0189 or equivalent crimp terminal.
TB2 DC Output	.156 friction lock header mates with Molex 09-50-3101 or equivalent crimp terminal housing with Molex 08-50-0189 or equivalent crimp terminal.
PF	Optional power fail signal.
G	Optional power fail signal return.

RECOMMENDED AIR FLOW DIRECTION

1 – Optimum 2 – Good 3 – Fair

ALL PSU LTD

Unit D6 Laser Quay | Culpeper Close | Medway City Estate | Rochester | Kent

ME2 4HU Tel : 01634 725527 | Fax : 01634 739111

Email : sales@allpsu.co.uk | Web : www.allpsu.co.uk